



**Monitoring report form for CDM programme of activities
(Version 05.0)**

Complete this form in accordance with the instructions attached at the end of this form.

MONITORING REPORT

Title of the PoA	Improved Cooking Stoves for Nigeria Programme of Activities		
UNFCCC reference number of the PoA	PoA Ref. 5067		
Version numbers of the PoA-DD applicable to this monitoring report	3.2		
Version number of this monitoring report	6.0		
Completion date of this monitoring report	10/11/2021		
Monitoring period number	09 th		
Duration of this monitoring period	01/07/2020 – 30/06/2021		
Monitoring report number for this monitoring period	1		
Coordinating/managing entity	Atmosfair gGmbH		
Host Parties	Host Party of the PoA	Is this the host Party of a CPA covered in this monitoring report? (yes/no)	
	Nigeria	yes	
Applied methodologies and standardized baselines	AMS II.G., version 3, "Energy Efficiency Measures in Thermal Applications of Non-Renewable Biomass"		
Sectoral scopes	3: Energy demand		
Amount of GHG emission reductions or net anthropogenic GHG removals achieved by all CPAs covered in this monitoring report in this monitoring period	Amount achieved before 1 January 2013	Amount achieved from 1 January 2013 until 31 December 2020	Amount achieved from 1 January 2021
	0	CPA 1: 2,500 t CO ₂ CPA 2: 2,645 t CO ₂ CPA 3: 2,795 t CO ₂ CPA 4: 2,103 t CO ₂ Total: 10,043 t CO ₂	CPA 1: 2,460 t CO ₂ CPA 2: 2,602 t CO ₂ CPA 3: 2,750 t CO ₂ CPA 4: 2,068 t CO ₂ Total: 9,880 t CO ₂
Amount of GHG emission reductions or net anthropogenic GHG removals estimated ex ante for this monitoring period in the CPA-DDs for the CPAs covered in this monitoring report	CPA 1: 8,505 t CO _{2e} CPA 2: 11,559 t CO _{2e} CPA 3: 11,627 t CO _{2e} CPA 4: 34,677 t CO _{2e} Total: 66,368 t CO _{2e}		

PART I Monitoring of programme of activities (PoA)

SECTION A. Description of PoA

A.1. General description of PoA

>>

Policy/measure or stated goal of the PoA

The aim of the PoA is to enhance the penetration of improved cooking stoves (ICS) by offering cost-effective efficient stoves. The ICS disseminated under this PoA save fuel wood and hence reduce greenhouse gas emissions stemming from the use of non-renewable biomass. The carbon revenues are utilised to recover the balance of costs.

General Description

The Improved Cooking Stoves (ICS) for Nigeria Programme of Activities is a joint initiative by the German NGOs atmosfair gGmbH and Lernen-Helfen-Leben e.V. (LHL) and the Nigerian Developmental Association for Renewable Energies (DARE) to promote dissemination of improved cooking stoves to households in the Federal Republic of Nigeria. The efficient stoves disseminated save up to 80% of fuel wood.

Confirmation that the proposed PoA is a voluntary action by the coordinating/managing entity.

atmosfair as the coordinating/managing entity hereby confirms that the PoA is a voluntary action. Participation of all involved stakeholders such as distributors in the program is completely voluntary.

There are no laws or regulations stipulating the use of efficient cook stoves. Existing laws and regulations concerning the protection of forestry areas in Nigeria are not enforced.

Contribution to sustainable development

Besides saving greenhouse gases, the programme aims to

- bring wood consumption down so as to allow natural recovery of forests and/or reforestation to take place,
- diminish Indoor Air Pollution from wood smoke and avoid its harmful health consequences,
- diminish the fuel wood bill for households,
- preserve wood resources so as to avoid inter-communal and/or inter-religious conflict over resources.

A.1.1. Corresponding generic component project activities (CPAs)

Title and reference number of the corresponding generic CPA	Version of the PoA-DD	Sectoral scopes	Applied methodologies and standardized baselines
CPA # X Improved Cooking Stoves for Nigeria	3.2	3: Energy demand	AMS II.G., version 3, "Energy Efficiency Measures in Thermal Applications of Non-Renewable Biomass"

A.1.2. CPAs included in the PoA

Title and UNFCCC reference number of	Version of the PoA-DD	Title and reference number of the corresponding generic	Crediting period type	Covered in this monitoring
--------------------------------------	-----------------------	---	-----------------------	----------------------------

the CPA		CPA	and duration	report? (yes/no)
CPA # 1 Improved Cooking Stoves for Nigeria; 5067-P1-0001-CP1 (Version 3.2)	3.2	CPA # X Improved Cooking Stoves for Nigeria	Fixed 10/11/2011 – 09/11/2021	yes
CPA # 2 Improved Cooking Stoves for Nigeria; 5067-P1-0002-CP1 (Version 3.2)	3.2	CPA # X Improved Cooking Stoves for Nigeria	Fixed 15/07/2012 – 14/07/2022	yes
CPA # 3 Improved Cooking Stoves for Nigeria; 5067-P1-0003-CP1 (Version 3.2)	3.2	CPA # X Improved Cooking Stoves for Nigeria	Fixed 15/07/2012 – 14/07/2022	yes
CPA # 4 Improved Cooking Stoves for Nigeria; 5067-P1-0004-CP1 (Version 3.2)	3.2	CPA # X Improved Cooking Stoves for Nigeria	Fixed 01/06/2013 – 31/05/2023	yes
CPA # 5 Improved Cooking Stoves for Nigeria; 5067-P1-0005-CP1 (Version 3.2)	3.2	CPA # X Improved Cooking Stoves for Nigeria	Fixed 01/06/2013 – 31/05/2023	no

A.2. Coordinating/managing entity

>>

atmosfair gGmbH
Zossener Strasse 55 -58
10961 Berlin, Germany
Contact person CME: Katrin Mikolajewski,
Tel: +49 (0) 30 120 8480 61
Email: mikolajewski@atmosfair.de

SECTION B. Implementation of PoA

B.1. Description of implemented PoA

>>

Two stove types have been implemented in this PoA. The save 80 stove in CPA 1, CPA2 and CPA4 and the envirofit stove in CPA 3.

The "SAVE80", is a portable stove made of stainless steel, developed and prefabricated by a German manufacturer and assembled locally to create employment and income. As per specification of the manufacturer, the SAVE80 needs only about 250 g of small brittle sticks of wood to bring 6 litres of water to the boil, 80% less than traditional fire places. The design ensures preheating of the air and a complete combustion with no visible smoke and only small amounts of ash. The SAVE80 system also consists of custom-fit pots, pans and a heat retaining box ('Wonderbox'), where food can be transferred after reaching the boiling temperature, and where it will continue to simmer until it is well cooked.

The Envirofit G3300 is a wood burning rocket stove. Its unique design makes it easier to start a fire quickly and produces a much hotter and cleaner fire that uses significantly less fuel. A port (stove mouth) on one side of the stoves enables the user to feed fuel wood into the burning chamber. The inner and outer wood grate helps to feed in the wood and guarantee better ventilation. Only small wood sticks are needed to start the fire and keep it burning. After lighting, air is sucked in and enters the burning chamber from below. The combustion chamber is made out of alloy which

prevents deterioration of the chamber and gives it an exceptionally long life. The design of the stove enables a fully combustion with a highly reduced smoke emission and only a small production of ash.

Number of stoves sold under each CPA:

- CPA 1: 2,834 stoves
- CPA 2: 2,998 stoves
- CPA 3: 2,118 stoves
- CPA 4: 2,383 stoves

The Number of sold stoves in this Monitoring Period is lower compared to the Last monitoring Period MP8, since we removed the drop-out cases found during the MP8 form the database.

1.Implementation of the management system of the PoA

Roles and responsibilities of personnel

Managing entity

atmosfair serves as managing entity and sole legal representative of the programme. Therefore, atmosfair is the coordinating entity and sole focal point which communicates with the Board, including on matters relating to the distribution of CERs. atmosfair ensures that all CPAs under its PoA are neither registered as an individual CDM project activity nor included in another registered PoA and in case of new CPAs that they are subscribed to the PoA. atmosfair manages a central database for all CPAs.

Other tasks of the managing entity may include:

- Partnering with and contracting of ICS suppliers and distributors
- Stove procurement, i.e. order and shipment (if applicable) to the distributors
- Development of numbering procedures to avoid double counting, also with regard to other PoAs or CDM projects in Nigeria
- Assignment of DOEs for validation, CPA inclusion and verifications

Distributors

Tasks of registered distributors may include:

- stove assembly, if applicable
- Training of stove assemblers, if applicable
- Numbering of stoves, if applicable
- Stove promotion, incl. trainings and demonstrations
- Stove sales
- Customer support
- Monitoring data collection (e.g. contact details from stove users as required for the monitoring), processing and storage

In this monitoring period there were no stove sales under this PoA.

Record keeping system for each CPA under the PoA

An electronic record keeping system is operated and maintained by the managing entity for each CPA under the PoA, which contains at least the following information per CPA:

- Name and ID of the CPA
- Technology deployed (Name of the ICS type)
- Name and contact details of the registered distributors for the CPA, date of registration of the distributor
- Serial numbers (Stove-ID) of the ICS belonging to the CPA and corresponding information required for monitoring
- Start of CPA crediting period

The record keeping system will be updated as per the progress of the CPA.

Each improved cooking stove will start to generate emission reductions in the month following the sales date (or the date of CPA inclusion, whichever is later), to account for delays between sales and first use.

Data will be kept for the whole crediting period of the CPA and an additional two years.

Avoid double counting

In each CPA-DD it is stated that the CPA has not been and will not be registered either as a single CDM project activity or as a CPA under another PoA.

The serial numbers allocated to each ICS under the PoA allow unique identification and tracking of the ICS. Based on the serial numbers, an ICS can only count in one CPA.

Awareness and agreement of those operating a CPA on PoA subscription

The provisions to ensure that those operating the CPA are aware of and have agreed that their activity is being subscribed to the PoA are taken.

It is ensured that all parties involved in implementing a CPA are aware and agree that the CPAs are subscribed to the PoA.

Trainings

CME ensures that all involved parties in the CPAs (e.g. distributors, CPA operators if different from the CME) are trained adequately to meet the documentation requirements of the PoA.

Regularly, physical or virtual meetings are carried out where the parties involved are exchanging their experiences and will receive updates from the CME which CME considers relevant to properly carry out the PoA.

2. Implementation of single sampling plan(s)

A single sampling plan was implemented for CPA1: 5067-0001, CPA2: 5067-0002 and CPA4: 5067-0004, where as a separate sampling plan was implemented for CPA3: 5067-0003 (see details below, section E.3)

B.2. Post-registration changes to PoA

B.2.1. Corrections

>>

There are no corrections to programme information or parameters fixed at registration that

- (a) have been approved by the Board for the periods prior to this monitoring period
- (b) have been approved by the Board for this monitoring period
- (c) are being submitted with this monitoring report as part of the request for issuance (post-registration change – issuance track).

B.2.2. Inclusion of monitoring plan

>>

There is no inclusion of a monitoring plan into the PoA-DD, for which the delayed submission of the monitoring plan was chosen by the coordinating/managing entity at the time of the registration of the PoA that

- (a) has been approved by the Board for the periods prior to this monitoring period
- (b) is being submitted with this monitoring report (post-registration change – issuance track).

B.2.3. Permanent changes to the registered monitoring plan, or permanent deviation of monitoring from the applied methodologies, standardized baselines, or other methodological regulatory documents

>>

There are permanent changes to the approved revised monitoring plan that

- (a) have been approved by the Board prior to this monitoring period:

A revision of the monitoring plan as Post Registration Change was triggered due to FAR1 raised by the DOE during MP1 following an incomplete notification for the first issuance request by the UNFCCC (http://cdm.unfccc.int/PoAIssuance/iss_db/poaiss571744464/view).

The PoA-DD and CPA-DDs were revised accordingly and now hold the version number 03.2.
Completion Date of the revised PoA DD and CPA PDDs: 24/09/2014

According to the FAR, the following changes have been made in the approved revised monitoring plan:

The PoA-DD and CPA-DDs were revised in a way to now incorporate the requirements of the latest sampling standard and sampling guidelines for monitoring with reference to

- (a) the Desired Precision/Expected Variance and Sample Size;
- (b) the frequency of sampling for each parameter (i.e. annual or biennial);
- (c) the information regarding how the ICS age will be classified (e.g. classification of ICS deployed each 6 months);

The outline of the monitoring report was adapted to the sampling guidelines for monitoring (EB75 Annex 8: Guideline for sampling and surveys for CDM project activities and programmes of activities). Detailed information on the desired precision, expected variance and sample size for the corresponding sampling frequency was provided in section D.7.2 A.4 of the CPA DDs. Frequency of sampling is provided in section D.7.1 of the CPA DDs. Information on age class classification is provided in section D.7.2 A.3 Sampling method.

Also a detailed description of the simple random sampling approach was included in the PoA-DD and CPA-DDs section D.7.2 A.3 Sampling Method, Approach 1: Simple Random Sampling.

Date of acceptance of the post registration change by the EB: 29.12.2014 (Effective approval date: 25.12.2014).

The Monitoring Report is drafted in line with the revised monitoring plan PoA-DD and CPA DD (versions 03.2)

There are no further changes that

- (a) have been approved by the Board for this monitoring period
- (b) are being submitted with this monitoring report as part of the request for issuance (post-registration change – issuance track).

B.2.4. Changes to programme design

>>

There are no changes to programme design of the PoA that

- (a) have been approved by the Board for the periods prior to this monitoring period
- (b) have been approved by the Board for this monitoring period
- (c) are being submitted with this monitoring report as part of the request for issuance (post-registration change – issuance track).

B.2.5. Changes specific to afforestation or reforestation activities

>>Not applicable

PART II Monitoring of CPAs

>>

SECTION C. Implementation of CPAs

C.1. Description of implemented CPAs

>>

1. Purpose of the CPA(s) and the measures taken for GHG emission reductions

The purpose of the CPAs is the dissemination of improved cooking stoves to households in Nigeria. The CME of the PoA and CPAs is atmosfair gGmbH.

The ICS disseminated under this CPA save fuel wood and hence reduce greenhouse gas emissions stemming from the use of non-renewable biomass.

2. Implementation status of the CPAs

(a) Brief description of the installed technology and equipment

The improved cook stove (ICS) disseminated under SSC-CPA 1, SSC-CPA 2 and SSC-CPA 4 is the "SAVE80", a portable stove made of stainless steel, developed and prefabricated by a German manufacturer and assembled locally to create employment and income.

The improved cook stove disseminated under the SSC-CPA 3 is the Envirofit G3300, a wood efficient burning rocket stove.

(b) Information on the implementation and actual operation of the CPAs, including relevant dates

Number of stoves per CPA considered in this MR:

- CPA 1: 2,834 stoves
- CPA 2: 2,998 stoves
- CPA 3: 2,118 stoves
- CPA 4: 2,383 stoves

Relevant dates:

Date	Milestone
29/03/2011	Starting Date of the CPA#1
29/03/2011	Starting Date of stove distribution CPA#1
10/11/2011	PoA registration date and inclusion date of CPA #1
10/11/2011	Starting date of crediting period CPA #1

10/11/2011-30/06/2012	First Monitoring Period
05/02/2014	First issuance
01/01/2012	Starting Date of the CPA#2
14/01/2012	Starting Date of stove distribution CPA#2
11/07/2012	Date of CPA#2 inclusion
15/07/2012	Starting date of Crediting period CPA#2
01/01/2012	Starting Date of the CPA#3
07/01/2012	Starting Date of stove distribution CPA#3
11/07/2012	Date of CPA#3 inclusion
15/07/2012	Starting date of the crediting Period CPA #3
01/07/2012-30/06/2013	Second monitoring Period
01/01/2012	Starting Date of the CPA#4
12/07/2013	Starting Date of stove distribution CPA#4
29/05/2013	Date of CPA#4 inclusion
01/06/2013	Starting Date of the crediting Period CPA #4
01/07/2013-30/06/2014	Third monitoring Period
01/07/2014-30/06/2015	Fourth monitoring Period
01/07/2015-30/06/2017	Fifth Monitoring Period
01/07/2017-30/06/2018	Sixth Monitoring Period
01/07/2018-30/06/2019	Seventh Monitoring Period
10/11/2018-09/11/2025	Renewal Period
15/10/2020	Renewal date of the PoA
01/07/2019-30/06/2020	Eighth Monitoring Period
01/07/2020-30/06/2021	Ninth Monitoring Period

C.2. Location of CPAs

>>

(a) Host Party:

Federal Republic of Nigeria

(b) Region/ State/ Province:

The region, where ICS are distributed is the Federal Republic of Nigeria for all CPAs (1-4), since CPAs are not defined by location, but by stove numbers. The exact sales location for each stove is recorded on the sales receipt and documented in the sales record database. Please see below the list of states in which stoves have been distributed in the different CPAs.

CPA 1	CPA 2	CPA 3	CPA 4
Abia State	Abia State	Federal Capital/ Abuja	Abia
Federal Capital/Abuja	Federal Capital/Abuja	Adamawa State	Adamawa State
Adamawa State	Adamawa State	Anambra	Anambra State
Akwa Ibom State	Akwa Ibom State	Bauchi State	Bauchi State
Anambra State	Anambra State	Benue State	Benue State
Bauchi State	Bauchi State	Borno State	Borno State
Bayelsa State	Benin State	Edo State	Edo State
Benue State	Benue State	Gombe State	Enugu State
Borno State	Borno State	Jigawa State	Gombe
Cross Rivers State	Delta State	Kaduna State	Gombe State
Delta State	Edo State	Kano State	Imo State
Ebonyi State	Ekiti State	Katsina State	Jigawa State
Edo State	Enugu State	Kebbi	Kaduna State
Ekiti state	FCT	Kogi State	Kano State
Enugu State	Gombe State	Lagos State	Katsina State

FCT	Ibadan	Plateau State	Kwara State
Funtuna	Imo State	Taraba State	Lagos State
Gombe State	Jigawa State	Yobe	Nasarawa
Imo State	Kaduna State	Zamfara State	Nassarawa
Jigawa State	Kano State		Niger State
Kaduna State	Katsina State		Ondo State
Kano State	Kebbi State		Plateau State
Katsina State	Kogi state		Sokoto
Kebbi State	Kwara State		Yobe
Kogi State	Lagos State		Zamfara State
Kwara State	Nassarawa State		
Lagos State	Niger State		
Nassarawa State	Ogun State		
Niger State	Ondo State		
Ogun State	Osun State		
Ondo State	Oyo State		
Osun State	Plateau State		
Oyo State	Rivers State		
Plateau State	Sokoto State		
Rivers State	Taraba State		
Sokoto State	Yobe State		
Taraba State	Zamfara State		
Yobe State			
Zamfara State			

(c) City/ Town/ Community:

The ICS of all CPAs 1- CPA 4 were installed in households all over the Federal Republic of Nigeria. For distribution of stove in the single CPAs please see the table provided above.

(d) Physical/ Geographical location:

All appliances disseminated under this CPA have a unique serial number, allowing to doubtlessly identify the appliance. Serial numbers are transferred to the corresponding CPA electronic record keeping system. For distribution of stove in the single CPAs please see the table provided above.

C.3. Post-registration changes to CPAs

C.3.1. Temporary deviations from the monitoring plans in the included CPA-DDs, applied methodologies, standardized baselines or other methodological regulatory documents

>>

There are no temporary deviations from the monitoring plans in the included CPA-DDs for any of the CPAs covered in this monitoring report.

C.3.2. Corrections

>>

There are no corrections to project information or parameters fixed at the inclusion of any of the CPAs covered in this monitoring report.

C.3.3. Changes to the start date of the crediting period

>>

There are no changes to the start date of the crediting period fixed at the inclusion of any of the CPAs covered in this monitoring report.

C.3.4. Inclusion of monitoring plan

>>

There are no post-registration changes to include a monitoring plan into the CPA-DDs, for which the delayed submission of the monitoring plan was chosen by the coordinating/managing entity at the time of the inclusion of the CPAs, for any of the CPAs covered in this monitoring report.

C.3.5. Permanent changes to the included monitoring plans, or permanent deviation of monitoring from the applied methodologies, standardized baselines, or other methodological regulatory documents

>>

There are permanent changes to the monitoring plans included in the CPA-DDs for all of the CPA-DDs covered in this monitoring report. These changes have been

(a) notified to the secretariat as applicable from the period prior to this monitoring period:

A revision of the monitoring plan as Post Registration Change was triggered due to FAR1 raised by the DOE during MP1 following an incomplete notification for the first issuance request by the UNFCCC (http://cdm.unfccc.int/PoA/issuance/iss_db/poaiss571744464/view)

The PoA-DD and CPA-DDs were revised accordingly and now hold the version number 03.2.

Completion Date of the revised PoA DD and CPA PDDs: 24/09/2014

According to the FAR, the following changes have been made in the approved revised monitoring plan:

The PoA-DD and CPA-DDs were revised in a way to now incorporate the requirements of the latest sampling standard and sampling guidelines for monitoring with reference to

- the Desired Precision/Expected Variance and Sample Size;
- the frequency of sampling for each parameter (i.e. annual or biennial);
- the information regarding how the ICS age will be classified (e.g. classification of ICS deployed each 6 months);

The outline of the monitoring report was adapted to the sampling guidelines for monitoring (*EB75 Annex 8: Guideline for sampling and surveys for CDM project activities and programmes of activities*). Detailed information on the desired precision, expected variance and sample size for the corresponding sampling frequency was provided in section D.7.2 A.4 of the CPA DDs. Frequency of sampling is provided in section D.7.1 of the CPA DDS. Information on age class classification is provided in section D.7.2 A.3 Sampling method.

Also a detailed description of the simple random sampling approach was included in the PoA-DD and CPA-DDs section D.7.2 A.3 Sampling Method, Approach 1: Simple Random Sampling.

Date of acceptance of the post registration change by the EB: 29.12.2014 (Effective approval date: 25.12.2014).

The Monitoring Report is drafted in line with the revised monitoring plan PoA-DD and CPA DD (versions 03.2).

There are no further changes that have been

(b) notified to the secretariat as applicable from this monitoring period.

C.3.6. Changes to project design

>>

There are no changes to the project design of any of the CPAs covered in this monitoring report.

C.3.7. Changes specific to afforestation or reforestation CPA

>>

Not applicable

SECTION D. Description of monitoring system of CPAs

>>

The monitoring system is the same for all CPAs.

In line with PoA-DD and CPA-DDs, the monitoring consists of three stages:

1. (Continuous) sales monitoring
2. Sample surveys after the end of the monitoring period and prior to verification
3. Data compilation, quality control and drafting of the Monitoring Report

In response to the political situation in Nigeria the UN approved following exception which is valid until the 13th of June 2023 (INQ-09626_Response_EB106):

- a) The CME and DOE may apply a combination of survey and data collection methods as per section 9 of the "Guidelines for sampling and surveys for CDM project activities and programme of activities" (version 4.0, CDM-EB86-A04), for example using telephone interviews and household visits for the data collection;
- b) Joint site visits by the monitoring and verification personnel to collect data and evidence may be undertaken.

This exception was granted to CME following our request for clarification on monitoring and verification in conflict zones (INQ-09626), where we applied for contingency measures for monitoring and verification.

1.Sales monitoring

Sales monitoring serves to determine the adjusted total number of appliances deployed until period y (N_y).

The process of ICS deployment and sales monitoring data flow incl. organisational structure is illustrated in the following diagram:

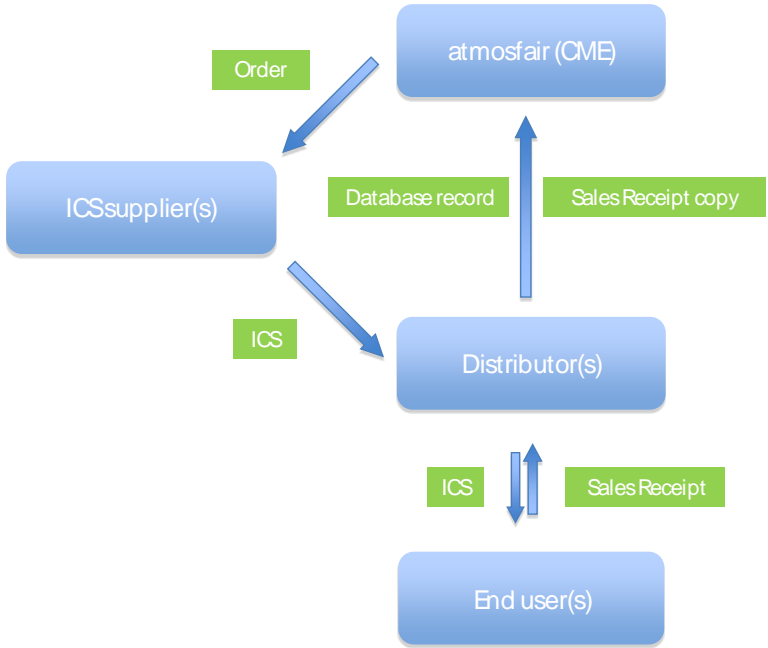


Diagram 1: Sales monitoring flow chart

Data generation:

Every end user acknowledges receipt of an ICS on a sales receipt. The sales receipt provides information on

- Name and contact details of the user
- Serial number of the ICS deployed
- Sales date

Data recording:

The distributor(s) collect the sales receipts from the end users and enter the information from the sales receipts into an electronic database (the "sales records database").

Data aggregation and reporting:

The distributors submit both, copies of the sales receipt and the electronic datasets from the sales receipts to the CME. CME checks for inconsistencies and instructs distributors to take corrective action if necessary.

In this monitoring period there were no new sales of ICS under the CPAs covered in the monitoring report.

2.Sample surveys

After the end of the monitoring period and prior to the verification, sample surveys are conducted that serve to determine the

- statistically adjusted drop out from total population of appliances in period y (DO_y)
- average number of eaters per appliance ($N_{eaters,appliance}$)
- adjusted average efficiency of the system being deployed (η_{new})

The sample survey data flow incl. organisational structure is illustrated in the following line diagram:



Diagram 2: Sample survey flow chart

Data generation:

The CME draws a random sample from the sales records database and submits the electronic sample incl. user details to the monitoring team. The monitoring team conducts the surveys (user interviews and efficiency tests) at the end user locations.

Data recording:

The monitoring team records the information from the user interviews on questionnaires and from the efficiency tests on data entry forms.

Data aggregation and reporting:

The monitoring team submits the questionnaires and the data entry forms to the CME. CME checks for inconsistencies and instructs the monitoring team to take corrective action if necessary. The CME aggregates and reports the results in an inspection database.

For the detailed sampling plan, see Section E.3.

3.Data compilation

The CME finally transfers the parameter values from the sales records database and from the inspection database to an Excel spreadsheet containing the equations to calculate the emission reductions of the monitoring period. The so achieved values are reported in the monitoring report.

Roles and responsibilities of personnel

Person	Role
Managing Entity database administrator	The database administrator is responsible for updating and maintaining all electronic databases.
Monitoring team	The monitoring team is assigned by the CME to conduct the user interviews and appliance tests during the periodic sampling and reports the results to the database administrator.

Emergency procedures for the monitoring system

The CME has implemented a system of cross-checks to ensure data quality. There is a separation of roles for every step of the data generation, aggregation & recording, calculation and reporting between those who are responsible and those who are controlling the respective step.

In particular, the CME database administrator checks correctness and consistency between information on the sales receipts and the corresponding sales database record. In case inconsistencies are detected, the CME database administrator instructs the distributors to search for the error source. If the error source can be found, the information is corrected accordingly, if not, the database record is removed from the database.

Furthermore, the CME database administrator checks the correctness and consistency of all sampling data collected and processed in this Monitoring Period.

SECTION E. Data and parameters

E.1. Data and parameters fixed ex ante

(Copy this table for each data or parameter.)

Data and parameters values valid for CPA 1, CPA 2, CPA 3 and CPA 4.

Data/Parameter	<i>B_{old, capita}</i>
Unit	t/year
Description	Average baseline fuelwood consumption per capita per year
Source of data	UN Statistics Database, Value for 2006; Nigeria Census Data 2006
Value(s) applied	0.692
Choice of data or measurement methods and procedures	The United Nations Statistics Division has published fuelwood consumption figures for households in Nigeria. To arrive at the per capita consumption, this figure is divided by the total population in Nigeria. The population data is taken from official census. Both data are taken from the same, most recent year for consistency reason.
Purpose of data/parameter	Baseline emission calculation
Additional comments	-

Data/Parameter	<i>η_{old}</i>
Unit	%
Description	Efficiency of the baseline system being replaced
Source of data	AMS II.G. (Ver. 3)
Value(s) applied	0.10
Choice of data or measurement methods and procedures	According to AMS II.G. ver. 3, a default value of 0.10 can be used "if the replaced system is the three stone fire or a conventional system lacking improved combustion air supply mechanism and flue gas ventilation system i.e., without a grate as well as a chimney".
Purpose of data/parameter	Baseline emission calculation
Additional comments	

Data/Parameter	<i>L_{NRB}</i>
Unit	-
Description	Net-to-gross adjustment factor for NRB Leakage
Source of data	AMS II.G. (Ver. 03)
Value(s) applied	0.95
Choice of data or measurement methods and procedures	As per the methodology AMS II.G. ver. 3, a default value as provided under par. 13 can be optionally used to account for leakages, in which case surveys are not required.
Purpose of data/parameter	Baseline emission calculation
Additional comments	

Data/Parameter	<i>L_{PoA}</i>
Unit	-
Description	Net-to-gross adjustment factor for PoA Leakage

Source of data	AMS II.G. (Ver. 03)
Value(s) applied	0.95
Choice of data or measurement methods and procedures	As per the methodology AMS II.G, ver. 3, a default value as provided under par. 23 can be optionally used to account for potential PoA leakages, in which case estimates of the leakage is not required.
Purpose of data/parameter	Baseline emission calculation
Additional comments	

Data/Parameter	$f_{NRB,y}$
Unit	-
Description	Fraction of woody biomass saved by the project activity in period y that can be established as non-renewable biomass
Source of data	FAO (2010): Global Forest Resource Assessment 2010, Country Report Nigeria, http://www.fao.org/forestry/20262-1-1.pdf
Value(s) applied	0.77
Choice of data or measurement methods and procedures	Though the NRB assessment comes to the conclusion that 100% of the woody biomass available to the end users is none-renewable, since none of the three conditions outlined in the methodology AMS II.G., ver. 3, par. 9 are fulfilled and hence it cannot be shown that demonstrably renewable woody biomass exists, a lower factor is used to be conservative.
Purpose of data/parameter	Baseline emission calculation
Additional comments	

Data/Parameter	$NCV_{biomass}$
Unit	TJ/t
Description	Net calorific value of the non-renewable woody biomass that is substituted
Source of data	AMS II.G (Ver. 3)
Value(s) applied	0.015
Choice of data or measurement methods and procedures	This is the IPCC default value for wood fuel as provided by AMS II.G ver. 3, par. 5.
Purpose of data/parameter	Baseline emission calculation
Additional comments	

Data/Parameter	$EF_{projected_fossilfuel}$
Unit	tCO ₂ /TJ
Description	Emission factor for the substitution of non-renewable biomass by similar consumers
Source of data	AMS II.G (Ver. 3)
Value(s) applied	81.6
Choice of data or measurement methods and procedures	This is the IPCC default value as provided by AMS II.G. ver. 3, par. 5.
Purpose of data/parameter	Baseline emission calculation
Additional comments	-

Data/Parameter	HH_CAP
Unit	Number

Description	Maximum number of eaters possible per specific ICS as applied in the specific CPA
Source of data	Manufactures specifications
Value(s) applied	8
Choice of data or measurement methods and procedures	According to manufactures specifications.
Purpose of data/parameter	Not used for emission reduction calculation. Only as cap for monitored parameter Neaters, appliance
Additional comments	-

Data/Parameter	$\eta_{specified}$
Unit	%
Description	Efficiency of the system being deployed as per manufacturer specification
Source of data	Manufactures specifications
Value(s) applied	For CPA 1, 2 and 4: 52 For CPA 3: 32.6
Choice of data or measurement methods and procedures	According to manufactures specifications.
Purpose of data/parameter	Not used for emission reduction calculation. Only for demonstration of fulfillment of eligibility criterion 2 (for CPA inclusion).
Additional comments	-

E.2. Data and parameters monitored

(Copy this table for each data or parameter.)

Data/Parameter	<i>N_{eaters,appliance}</i>
Unit	-
Description	Average number of eaters per appliance (capped at value for parameter HH_Cap, see above)
Measured/calculated/default	Calculated from sample survey
Source of data	Sample survey
Value(s) of monitored parameter	For CPA 1, 2 and 4 : 7.13 For CPA 3 : 7.42
Monitoring equipment	Questionnaire
Measuring/reading/recording frequency	Once for this monitoring period (i.e. annual monitoring) According to AMS-II.G. ver. 3, par. 22, and Standard for Sampling and surveys (CDM-EB50-A30_STAN vers. 4.1 par 20, confidence/precision criteria to be met is determined as follows: for CPA 1, 2 and 4: annual inspection at 95/10 confidence/precision and for CPA 3: annual inspection at 90/10 confidence/precision

Calculation method (if applicable)	<p>Monitoring of the statistically adjusted average number of eaters involves two steps:</p> <p>Step 1: Sample survey amongst appliances deployed Step 2: Calculation of the average number of eaters</p> <p>The average number of eaters is determined through interviews performed by a dedicated monitoring team. Interviews are reported in a questionnaire.</p> <p>Interviews are conducted until the required precision for this parameter is achieved. All questionnaires and information gathered during the sampling by the monitoring team are handed over to the managing entity that takes care of entering the information to an electronic database and updating databases where appropriate.</p>
QA/QC procedures	<p>All formulae applied to determine the statistical precision used, are standard formulae as of the Guideline "Sampling and surveys for CDM project activities and programmes of activities, version 3.0. Furthermore, according to AMS II.G (ver. 3), par. 22 the sampling error has to be deducted ("<i>...the lower bound of a [...] confidence interval of the parameter value may be chosen</i>") in the event that the required precision could not be achieved because of a small sample size. No deductions have to be made if the precision is achieved by sampling a proper number of appliances.</p> <p>Data will be collected using the standard procedures and will be kept for two years after the end of the crediting period or the last issuance of CERs for this project activity, whichever occurs later.</p>
Purpose of data/parameter	Baseline emission calculation
Additional comments	-

Data/Parameter	N_y
Unit	-
Description	Adjusted total number of appliances deployed until period y
Measured/calculated/default	Calculated
Source of data	Sales Records
Value(s) of monitored parameter	CPA 1: 2,834 stoves CPA 2: 2,998 stoves CPA 3: 2,118 stoves CPA 4: 2,383 stoves
Monitoring equipment	Sales receipts and sales records database
Measuring/reading/recording frequency	Continuous monitoring and recording of n_i

<p>Calculation method (if applicable)</p>	<p>The total number of appliances deployed until period y is calculated based on information monitored through the sales records database.</p> $N_y = \sum_{i=1}^y n_i \cdot OT_{adjusted,i,y}$ <table border="1" data-bbox="584 378 1414 1541"> <thead> <tr> <th>Parameter</th> <th>Unit</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>n_i</td> <td>-</td> <td>Number of appliances deployed in period i as reported in the sales records database and adjusted to account for delays between sales date and first use. Every appliance starts to operate (deployment date) in the month following the month in which the appliance was sold.</td> </tr> <tr> <td>$OT_{adjusted,i,y} = \begin{cases} 1 & , i < y \\ \frac{d_{average,y}}{mp_{length}} & , i = y \end{cases}$</td> <td>-</td> <td>Adjustment factor for reduced operational time of appliances deployed in monitoring period y, whereas $i = 1, \dots, y$. For all appliances deployed in the periods i prior to Monitoring period y, the adjustment factor is 1.</td> </tr> <tr> <td>$d_{average,y}$</td> <td>days</td> <td>Average number of days appliances deployed in period y have been operational in period y as determined by respective deployment dates of appliances counted for n_y. Deployment dates are determined mutatis mutandis as in the context of n_i above.</td> </tr> <tr> <td>mp_{length}</td> <td>days</td> <td>Length of monitoring period y</td> </tr> </tbody> </table>	Parameter	Unit	Description	n_i	-	Number of appliances deployed in period i as reported in the sales records database and adjusted to account for delays between sales date and first use. Every appliance starts to operate (deployment date) in the month following the month in which the appliance was sold.	$OT_{adjusted,i,y} = \begin{cases} 1 & , i < y \\ \frac{d_{average,y}}{mp_{length}} & , i = y \end{cases}$	-	Adjustment factor for reduced operational time of appliances deployed in monitoring period y, whereas $i = 1, \dots, y$. For all appliances deployed in the periods i prior to Monitoring period y, the adjustment factor is 1.	$d_{average,y}$	days	Average number of days appliances deployed in period y have been operational in period y as determined by respective deployment dates of appliances counted for n_y . Deployment dates are determined mutatis mutandis as in the context of n_i above.	mp_{length}	days	Length of monitoring period y
Parameter	Unit	Description														
n_i	-	Number of appliances deployed in period i as reported in the sales records database and adjusted to account for delays between sales date and first use. Every appliance starts to operate (deployment date) in the month following the month in which the appliance was sold.														
$OT_{adjusted,i,y} = \begin{cases} 1 & , i < y \\ \frac{d_{average,y}}{mp_{length}} & , i = y \end{cases}$	-	Adjustment factor for reduced operational time of appliances deployed in monitoring period y, whereas $i = 1, \dots, y$. For all appliances deployed in the periods i prior to Monitoring period y, the adjustment factor is 1.														
$d_{average,y}$	days	Average number of days appliances deployed in period y have been operational in period y as determined by respective deployment dates of appliances counted for n_y . Deployment dates are determined mutatis mutandis as in the context of n_i above.														
mp_{length}	days	Length of monitoring period y														
<p>QA/QC procedures</p>	<p>Data will be collected using the standard procedures and will be kept for two years after the end of the crediting period or the last issuance of CERs for this project activity, whichever occurs later.</p>															
<p>Purpose of data/parameter</p>	<p>Baseline emission calculation</p>															
<p>Additional comments</p>	<p>Since there were no new appliances deployed during the monitoring period and under the CPAs covered in this monitoring period, the adjustment factor $OT_{adjusted,i,y}$ is 1.</p>															

Data/Parameter	DO_y
Unit	%
Description	Statistically adjusted drop out from total population of appliances in period y
Measured/calculated/default	Calculated from sample survey
Source of data	Sample survey

Value(s) of monitored parameter	For CPA 1, 2 and 4: 27.91% (since the required precision was not achieved, the lower bound value was used: 41.28 %) For CPA 3: 8.82 %
Monitoring equipment	Questionnaire
Measuring/reading/recording frequency	Once for this monitoring period (i.e. annual monitoring)
Calculation method (if applicable)	Monitoring of the statistically adjusted drop out involves two steps: Step 1: Sample survey amongst appliances deployed Step 2: Calculation of the adjusted drop-out rate at confidence level and precision as required by the methodology (AMS II.G. ver. 3) for the inspection frequency chosen, following the statistical standard approach for a homograde test of independent units that have a standard normal distribution. The Drop outs are determined through interviews where it is checked if the appliances are still operational, performed by a dedicated monitoring team. Interviews are reported in a questionnaire. All questionnaires and information gathered during the sampling by the monitoring team are handed over to the managing entity that takes care of entering the information to an electronic database and updating databases where appropriate.
QA/QC procedures	All formulas applied to determine the statistical precision used are standard formula. Furthermore, according to AMS II.G (ver. 3), par. 22 the sampling error has to be deducted (“...the lower bound of a [...] confidence interval of the parameter value may be chosen”) in the event that the required precision could not be achieved because of a small sample size. No deductions have to be made if the precision is achieved by sampling a proper number of appliances. Data will be collected using the standard procedures and will be kept for two years after the end of the crediting period or the last issuance of CERs for this project activity, whichever occurs later.
Purpose of data/parameter	Baseline emission calculation
Additional comments	-

Data/Parameter	η_{new}
Unit	%
Description	Adjusted average efficiency of the system being deployed
Measured/calculated/default	Calculated from sample survey
Source of data	Sample survey
Value(s) of monitored parameter	for CPA 1,2 and 4: 34.50% for CPA 3: 29.21%

Monitoring equipment		<u>Precision Balance</u>
	Type/Name	KD 8000
	Accuracy class	+/- 1 g
	Serial number	ESN5678224992T
	Calibration status	Calibrated on 31/05/2021
		<u>Thermometer</u>
	Type/Name	Greisinger Präzisionsthermometer GMH 3710
	Accuracy class	Temperature range -199.99° C - +199.99° C
	Serial number	32402476
	Calibration status	Calibrated on 31/05/2021
Measuring/reading/recording frequency	Once for this monitoring period (i.e. anual monitoring)	
Calculation method (if applicable)	<p>Monitoring of the statistically adjusted drop out involves two steps:</p> <p>Step 1: Sample survey amongst appliances deployed</p> <p>Step 2: Calculation of the average efficiency at confidence level and precision as required by the methodology (AMS II.G. ver. 3) for the inspection frequency chosen, following the statistical standard approach for a heterograde test of independent units that have a standard normal distribution.</p> <p>η_{new} is determined following the Water Boiling Test (WBT), performed by a dedicated monitoring team.</p> <p>Checks are conducted until the required precision for this parameter is achieved.</p>	
QA/QC procedures	<p>All formulas applied to determine the statistical precision are standard formula. Furthermore, according to AMS II.G (ver. 3), par. 22 the sampling error has to be deducted (“...the lower bound of a [...] confidence interval of the parameter value may be chosen”) in the event that the required precision could not be achieved because of a small sample size. No deductions have to be made if the precision is achieved by sampling a proper number of appliances.</p> <p>Data will be collected using the standard procedures and will be kept for two years after the end of the crediting period or the last issuance of CERs for this project activity, whichever occurs later.</p> <p>Cross-checks: The monitoring team will cross-check results with the efficiency as determined at CPA inclusion stage. Additionally, literature values may also be used to compare the results.</p>	
Purpose of data/parameter	Baseline emission calculation	
Additional comments	-	

E.3. Implementation of sampling plan

>>

The sampling plan was applied to all CPAs covered under this monitoring report, i.e.

CPA1: 5067-P1-0001-CP1
 CPA2: 5067-P1-0002-CP1
 CPA3: 5067-P1-0003-CP1
 CPA4: 5067-P1-0004-CP1

b) Description of implemented sampling design

A single sample (the “Inspection database”) for CPA 1, CPA 2 and CPA 4 was drawn from the sample database (corresponds to sales records database) by the CME via a computerized randomizer based on which all of the parameters determined via sampling were monitored. A separate sample was drawn for CPA 3 from the corresponding database via a computerized randomizer based on which all of the parameters of CPA 3 determined via sampling were monitored. According to the Monitoring plan of the approved revised PoA sampling was carried out across CPAs for CPA 1, 2 and 4, because they deploy the same stove type. Sampling of CPA 3 was carried out separately, since CPA 3 deploys a different stove type than CPA 1, 2 and 4. Total number of ICS considered for the emission reduction calculation of this MP 9 in CPA 1, 2, 4 is 8,215 and total number of ICS considered for the emission reduction calculation of this MP 9 in CPA 3 is 2,118. Therefore total number of ICS considered in all CPAs covered in this monitoring report is 10,333.

The number of ICS considered for ER calculation per CPA are:

CPA 1: 2,834 stoves
 CPA 2: 2,998 stoves
 CPA 3: 2,118 stoves
 CPA 4: 2,383 stoves
 Total: 10,333 stoves

According to AMS II.G. ver. 3, par. 15 and 16, “Monitoring shall consist of checking the efficiency of all appliances or a representative sample thereof, at least once every two years (biennial) to ensure that they are still operating at the specified efficiency (η_{new}) or replaced by an equivalent in service appliance. Where replacements are made, monitoring shall also ensure that the efficiency of the new appliances is similar to the appliances being replaced.

Monitoring shall also consist of checking of all appliances or a representative sample thereof, at least once every two years (biennial) to determine if they are still operating or are replaced by an equivalent in service appliance”

Furthermore, according to par. 20, monitoring shall ensure that:

“Either the replaced low efficiency appliances are disposed of and not used within the boundary or within the region; or

If baseline stoves continue to be used, monitoring shall ensure that the fuel-wood consumption of those stoves is excluded from B_{old} .”

For this reason, parameters as stated in Section E.2. of this Monitoring Report are monitored. Due to the high number of appliances deployed an annual check of operation and efficiency of all appliances is economically not feasible. Therefore a representative sample was monitored to ensure that all the appliances deployed are still operating or not, or if appliances have been replaced. Additionally the efficiency of the appliances deployed and number of eaters per household was monitored within the representative sample to account for possible continuous use of baseline stoves.

N_y is monitored through sales/distribution records for all appliances deployed till the end of the Monitoring period, whereas the other parameters were determined through a sample survey.

Precision requirements:

As per applicable methodology AMS-II.G. ver. 3, par. 22: *“When biennial inspection is chosen a 95% confidence interval and a 5% margin of error requirement shall be achieved for the sampling parameter. On the other hand when the project proponent chooses to inspect annually, a 90% confidence interval and a 10% margin of error requirement shall be achieved for the sampled parameters. In cases where survey results indicate that 90/10 precision or 95/5 precision is not achieved, the lower bound of a 90% or 95% confidence interval of the parameter value may be chosen as an alternative to repeating the survey efforts to achieve the 90/10 or 95/5 precision.”*

Additional requirement for PoAs:

Parameter values shall be estimated by sampling in accordance with the requirements in the applied methodology separately and independently for each of the CPAs included in a PoA except when a single sampling plan covering a group of CPAs is undertaken. In this case, stricter confidence/Precision requirements do apply (95/10 instead of 90/10). Since annual monitoring is undertaken, those confidence/precision requirements apply:

According to the Monitoring plan of the latest PoA DD sampling was carried out across CPA 1, 2 and 4, because they deploy the same stove type. Therefore as per methodology 95/10 confidence/precision for the sampling applied. For the monitoring of the single CPA 3, which deploys a different stove type, 90/10 confidence/precision for the sampling applied.

Two separate monitoring samples were drawn, one for CPA 1, 2 and 4 and one for CPA 3, in order to obtain two separate inspection databases for the across CPA sample CPA1, 2 and 4 and one for the separate CPA3. Both samples were drawn using the same approach described below.

In accordance with the monitoring plan of the latest PoA DD the CME can choose between three different sampling approaches.

The sampling approach chosen for this monitoring period was Approach 1: Simple random sampling, as the sales record databases equals the sample database in terms of numbers of stoves. In order to obtain a final representative sample (Inspection database), we drew a simple random sample from the Sample database by means of a computerized randomizer¹. The sample database equals the sales record database (in terms of number of cases). Since the resulting Inspection database is a random sample, stoves from all age classes and geographical representation are selected as per their share in the sample database.

In accordance with the Monitoring Plan of the latest PoA DD and to reduce monitoring efforts a common sample is drawn from the sales records database based on which all of the parameters shall be monitored. This does not imply that for each of the parameters the same number of users/ICS has to be monitored during sampling. The required sample sizes were calculated prior to conducting the sample survey using the equations for simple random sampling as per CDM requirements.

Across CPA Sample CPA 1, 2 and 4:

¹ The randomizer macro was programmed by atmosfair based on the excel tool of “RAND()” (<https://support.office.com/en-in/article/RAND-function-e98f1011-127d-4815-96f5-a26850ca1866>). The random select tool was provided to the DOE.

Table E.3.1 shows the estimated sample size and the applied sample size for the parameters of interest for CPAs 1, 2 and 4, calculated to reach the targeted confidence/precision and based on values from the previous monitoring period.

We applied oversampling since as per CDM-EB50-A30-STAN, footnote 10, to compensate for outliers or non-response associated with the sample. We assumed 18% response rate for DO_y , and for N_{eaters} and 4% response rate for n_{new} , based on the experience from last monitoring period.

The monitoring team undertook the monitoring of the parameters determined via sampling simultaneously and on the same sample, but with different required sample sizes since the confidence/precision of the parameter depend on the variation of the obtained values.

Table E.3.1: Applied sample size for CPA 1 and same for CPA 2 and for CPA 4.

Parameter	Timeframe	Targeted Confidence / Precision	Estimated value*	Expected Standard Deviation *	Calculated Sample Size	Applied sample size
DO_y	annual	95/10	0.90	No variance	43	43
$N_{eaters,appliance}$	annual	95/10	6.58	1.52	23	30
η_{new}	annual	95/10	0.338	0.03	7	9

*results from monitoring of PoA MP8

Single CPA Sample CPA 3:

Table E 3.2 shows the estimated sample size for the parameters of interest for CPA 3, calculated to reach the targeted confidence/precision and based on values from the previous monitoring period.

We applied oversampling since as per CDM-EB50-A30-STAN, footnote 10 to compensate for, outliers or non-response associated with the sample. We assumed 18% response rate for DO_y and for N_{eaters} and 4% response rate for n_{new} , based on the experience from last monitoring period.

The monitoring team undertook the monitoring of the parameters determined via sampling simultaneously and on the same sample, but with different required sample sizes since the confidence/precision of the parameter depend on the variation of the obtained values.

Table E.3.2: Applied sample size for CPA 3

Parameter	Timeframe	Targeted Confidence / Precision	Estimated value*	Expected Standard Deviation *	Calculated Sample Size	Applied sample size
DO_y	annual	90/10	0.90	No variance	30	34
$N_{eaters,appliance}$	annual	90/10	7.33	0.61	4	31
η_{new}	annual	90/10	0.331	0.02	3	8

*results from monitoring of PoA MP8

Monitoring of the parameters DO_y and $N_{eaters_appliance}$ was done through interviews of stove users using a common questionnaire. Monitoring of the parameter η_{new} , was done by applying the Water Boiling Test (WBT) protocol.

c,d,e) Collected data, analysis of the collected data and demonstration of whether the required confidence/precision level has been met

The following tables summarise the collected data, give the analysis of the samples and the demonstration on whether the confidence/precision has been met.

CPAs 1,2 and 4:

Parameter	n*	Result	Standard deviation	Confidence	Precision	Lower bound applicable?
DO_y	43	27.91 %	0.07	95%	18.55%	Yes
$N_{eaters_appliance}$	30	7.13	1.17	95%	6.10%	No
η_{new}	9	34.50%	0.04%	95%	8.02%	No

*valid responses

CPA 3:

Parameter	n*	Result	Standard deviation	Confidence	Precision	Lower bound applicable?
DO_y	34	8.82%	No variance	90%	8.71%	No
$N_{eaters_appliance}$	31	7.42	0.81	90%	3.29%	No
η_{new}	8	29.21%	0.02	90%	5.24%	No

*valid responses

f) Demonstration of whether the selected samples are representative of the population

The selected samples are representative of the population since they were randomly drawn from the sales/distribution record databases containing the full ICS population considered under CPA 1, 2, 3 and 4 for this Monitoring Period.

For the monitoring parameters DO_y , and η_{new} , the target population consists in all ICSs which are included until the end of the monitoring period (30/06/2020). Total number of applied stoves in CPA 1, 2 and 4 is 8,215. The total number of applied stoves for CPA 3 is 2,118 stoves. There were no new ICS deployed in this monitoring period in any of the CPAs covered under this monitoring report.

The achieved response rate for the common sample was 18.22% and 3.81% for the parameter n_{new} for CPA1,2 and 4. The achieved response rate for the common sample was 18.38% and 4.32% for the parameter n_{new} for CPA3.

For the monitoring parameter $N_{eaters,appliance}$, the target population consists in all Save80 stoves (CPA 1, 2 and 4) or Envirofit stoves (CPA 3) respectively which are included until the end of the monitoring period; however households, where stoves are found to be not operational will not be considered to determine $N_{eaters,appliance}$.

f) Demonstration of whether the samples were randomly selected and are representative of the population

The users were randomly selected via a computerized randomizer from the sales record databases containing the full ICS population considered under CPA 1, 2 and 4 (single sampling plan) and CPA 3 (separate sample) for this Monitoring Period and as described above.

Quality assurance / Quality control

Procedures for conducting the data collection and/or field measurements:

Data collection and administration of data:

To ensure completeness and accuracy of monitoring information, electronic databases per CPA are operated and maintained by the CME's database manager.

Sample database

There are two separate sample databases existing, one for CPA 1, 2 and 4 and one for CPA 3. The sample databases are equal to their respective sales record data base (in terms of size) since all user details of all Save80 users or Envirofit G3300 users respectively are included in the sampling. The sample database keeps information on all appliances deployed. At least the following information will be recorded:

- Serial number of appliance sold
- Sales date
- CPA-ID (CPA to which the appliance belongs to)
- User details (Name, State, Local Government Area (LGA), Address if available, etc.)

Inspection Database

The Inspection databases keep monitoring results and information from the randomly sampled appliances of the respective CPAs. There is one Inspection database existing for CPA 1, 2 and 4 and one separate Inspection database for CPA 3. The following information was recorded:

- Serial number of appliance checked
- CPA-ID (CPA to which the appliance belongs to)

Information as determined during monitoring:

- Continuous operation of appliance (yes/no) (to determine parameter DO_y)
- Average number of eaters per appliance (to determine parameter $N_{eaters,appliance}$)
- Date of the check
- Efficiency tested (to determine parameter η_{new})

After the sample was drawn, a monitoring List containing stove numbers and contact details of the users was sent to the Monitoring teams. Data collected and processed by the field staff during monitoring was checked by the CMEs' database manager and the QA/QC Manager.

Training of field personnel

All personnel involved in the monitoring were trained to ensure that each of them undertakes an appropriate monitoring assignment according to the Monitoring Plan.

Documentation of out-of-population cases, refusals, other sources of non-responses

Refusals and non-respondents (i.e. households where the contact could not be established) were recorded by the monitoring team. The results were reported in the Reporting Form for user interviews.

Outliers

No outliers were recorded during the monitoring period.

SECTION F. Calculation of emission reductions or net anthropogenic removals**F.1. Calculation of baseline emissions or baseline net removals**

>>

Methodology ASM II.G., ver. 3 does not provide specific equations for calculation of baseline emissions, project emissions or leakage, only for Emission reductions. As leakage was considered ex-ante, B_{old} was adjusted to account for the quantified leakage.

F.2. Calculation of project emissions or actual net removals

>>

Not applicable, as methodology ASM II.G., ver. 3 does not consider project emissions

F.3. Calculation of leakage emissions

>>

Net-to-gross adjustment factors for NRB leakage (L_{NRB}) and for PoA leakage (L_{PoA}) (fixed default values of 0.95 as per AMS II.G. ver.3) were applied to the project activity to calculate Emission Reductions of this Monitoring Period.

F.4. Calculation of emission reductions or net anthropogenic removals

CPA UNFCCC reference number	Baseline GHG emissions or baseline net GHG removals (t CO ₂ e)	Project GHG emissions or actual net GHG removals (t CO ₂ e)	Leakage GHG emissions (t CO ₂ e)	GHG emission reductions or net anthropogenic GHG removals (t CO ₂ e)			
				Before 01/01/2013	From 01/01/2013 until 31/12/2020	From 01/01/2021	Total amount
5067-P1-0001-CP1	4,960	Not applicable	Not applicable	0	2,500	2,460	4,960
5067-P1-0002-CP1	5,247	Not applicable	Not applicable	0	2,645	2,602	5,247
5067-P1-0003-CP1	5,545	Not applicable	Not applicable	0	2,795	2,750	5,545
5067-P1-0004-CP1	4,171	Not applicable	Not applicable	0	2,103	2,068	4,171
Total	19,923	Not applicable	Not applicable-	0	10,043	9,880	19,923

Equations used for calculation of emission reductions:

In line with the AMS II. G., ver. 3, emission reductions are calculated using the following equation: Emission Reductions are calculated as:

$$ER_y = B_{y,savings} \cdot f_{NRB,y} \cdot NCV_{biomass} \cdot EF_{projected_fossilfuel}$$

Parameter	Unit	Type	Description
ER_y	tCO ₂ e	Calculated	Emission reductions of the project activity in period y
$B_{y,savings}$	t	Calculated	Quantity of woody biomass that is saved by the CPA in period y.

$f_{NRB,y}$		Fixed	Fraction of woody biomass saved by the project activity in period y that can be established as non-renewable biomass: 0.77
$NCV_{biomass}$	TJ/t	Fixed	Net calorific value of the non-renewable woody biomass that is substituted: 0.015TJ/t
$EF_{projected_fossilfuel}$	tCO ₂ /TJ	Fixed	Emission factor for the substitution of non-renewable woody biomass by similar consumers: 81.6tCO ₂ /TJ

$B_{y,savings}$ is calculated according to the following formula, according to AMS II.G. ver. 3, par. 6, Option 2:

$$B_{y,savings} = B_{old} \cdot \left(1 - \frac{\eta_{old}}{\eta_{new}}\right)$$

Parameter	Unit	Type	Description
$B_{y,savings}$	t	Calculated	Quantity of woody biomass that is saved
$B_{old,i}$	t	Calculated	Quantity of woody biomass used in the absence of the project activity
$\eta_{old,i}$	%	Fixed	Efficiency of the baseline system being replaced 0.1
η_{new}	%	Monitored	Efficiency of the system being deployed as part of the project activity

$B_{old,i}$ is calculated according to the following formula:

$$B_{old} = B_{old,appliance} \cdot N_y \cdot (1 - DO_y) \cdot \frac{mp_{length}}{365} \cdot L_{NRB} \cdot L_{PoA}$$

Parameter	Unit	Type	Description
B_{old}	t	Calculated	Quantity of woody biomass used in the absence of the project activity
$B_{old,appliance}$	t/year	Monitored	Quantity of woody biomass used in the absence of the project activity in tons, per appliance
N_y	-	Monitored	Adjusted total number of appliances deployed in period y
DO_y	%	Monitored	Statistically adjusted drop out from total population of appliances in period y
mp_{length}	days	Monitored (implicitly, no extra parameter)	Length of monitoring period y
L_{NRB}	-	Fixed	Net-to-gross adjustment factor for NRB Leakage (0.95 default value)

L_{PoA}	-	Fixed	Net-to-gross adjustment factor for PoA Leakage (parametric value of 0.95)
-----------	---	-------	---

$B_{old,appliance}$ is calculated according to the following formula:

$$B_{old,appliance} = B_{old,capita} \cdot N_{eaters,appliance}$$

Parameter	Unit	Description
$B_{old,appliance}$	t/year	Quantity of woody biomass used in the absence of the project activity in tons, per appliance
$B_{old,capita}$	t/year	Average baseline fuelwood consumption per capita per year (fixed parametric value of 0.692 t/year)
$N_{eaters,appliance}$	-	Average number of eaters per project appliance (monitored parametric value, capped as per parameter HH_CAP)

Conservative approach

The approach followed in monitoring and calculation of emission reductions is conservative as required by the methodology AMS II G, v3, for the following reasons:

- A weighted emission factor (81.6 t CO₂/TJ) is used instead of the emission factor for wood (112 t CO₂/TJ). Therefore, only 73% of the de facto emission reductions when using the ICS can be taken into account.
- Additional fuel wood savings up to 50% from using the heat retaining device, the Wonderbox, are not considered in calculation of emission reductions.
- The ICS start to generate emission reductions only in the month following the sales of the ICS

F.5. Comparison of emission reductions or net anthropogenic removals achieved with estimates in the included CPA-DDs

CPA UNFCCC reference number	Amount achieved during this monitoring period (t CO ₂ e)	Amount estimated ex ante for this monitoring period in the CPA-DD (t CO ₂ e)
5067-P1-0001-CP1	4,960	8,505
5067-P1-0002-CP1	5,247	11,559
5067-P1-0003-CP1	5,545	11,627
5067-P1-0004-CP1	4,171	34,677
Total	19,923	66,368

F.5.1. Explanation of calculation of “amount estimated ex ante for this monitoring period in the CPA-DD”

>>

Regarding CPA 1, 2 and 4:

Total amount of emission reductions as per the approved revised CPA-DDs are 54,741 t CO₂eq whereas actual values achieved during this monitoring period are lower (14,378 t CO₂eq) than estimated in the CPA-DDs. The reasons for this is:

- the lower than expected number of stoves deployed till the end of the monitoring period 9 (8,215 stoves for CPA 1, CPA 2 and CPA 4 instead of the expected 16,000 for CPA 1, CPA 2 and CPA 4 according to the respective CPAs).

Additionally, other parameter values achieved during this monitoring period are lower than estimated in the CPA-DDs, which are responsible for the lower per unit stove ER values achieved during this monitoring period (1.75 t CO₂eq/stove) than estimated in the CPA-DDs (3.61 t CO₂eq/stove):

- the average number of eaters ($N_{\text{eater,appliance}}$) is lower (7.13 instead of 8)
- the efficiency is lower (34.50% instead of 52%)
- DO_y was higher (41.28% instead of 5%).

Regarding CPA 3:

In the approved revised CPA-DD, expected emission reductions are 11,627 t CO₂ for this monitoring Period.

The actual value achieved during this monitoring period is lower (5,545 t CO₂eq) than estimated in the CPA-DD. The reason is that compared to the estimates in the DD,

- the number of appliances deployed is lower (2,118 instead of 3,750 stoves)
- Additionally, other parameter values achieved during this monitoring period are lower than estimated in the CPA-DDs, which are responsible for the lower per unit stove ER values achieved during this monitoring period (2.62 t CO₂eq/stove) than estimated in the CPA-DDs (3.10 t CO₂eq/stove):
- the average number of eaters is lower (7.42 instead of 8)
- the efficiency is lower (29.21% instead of 32.60%).
- DO_y was higher (8.82% instead of 5%).

F.6. Remarks on increase in achieved emission reductions

>>

The total actual GHG emission reductions achieved is not greater than the total amount based on the ex ante estimations in the included CPA-DDs.

F.7. Remarks on scale of small-scale CPAs

>>

Number of stoves sold under each CPA:

CPA 1: 2,834 stoves	Microscale limit: 4,109 stoves
CPA 2: 2,998 stoves	Microscale limit: 4,109 stoves
CPA 3: 2,118 stoves	Microscale limit: 4,265 stoves
CPA 4: 2,383 stoves	Microscale limit: 4,487 stoves

Amount of energy savings achieved:

CPA 1: 41.38 GWh/a	Microscale limit: 60 GWh/a
CPA 2: 43.78 GWh/a	Microscale limit: 60 GWh/a
CPA 3: 29.79 GWh/a	Microscale limit: 60 GWh/a
CPA 4: 34.80 GWh/a	Microscale limit: 60 GWh/a

The combined energy savings of the stoves included in each of the 4 CPAs is well below the micro scale threshold.

Document information

<i>Version</i>	<i>Date</i>	<i>Description</i>
05.0	8 October 2021	Revision to: <ul style="list-style-type: none"> • Ensure consistency with version 03.0 of the “CDM project standard for programmes of activities” (CDM-EB93-A07-STAN).
04.0	6 April 2021	Revision to: <ul style="list-style-type: none"> • Reflect the “Clarification: Regulatory requirements under temporary measures for post-2020 cases” (CDM-EB109-A01-CLAR).
03.0	31 May 2019	Revision to: <ul style="list-style-type: none"> • Ensure consistency with version 02.0 of the “CDM project standard for programmes of activities” (CDM-EB93-A07-STAN); • Add a section on remarks on the observance of the scale limit of small-scale CPAs during the crediting periods; • Add "changes specific to afforestation or reforestation activities/CPA" as a possible post-registration changes; • Clarify the reporting of net anthropogenic GHG removals for A/R PoAs between two commitment periods; • Make structural and editorial improvements.
02.0	7 June 2017	Revision to: <ul style="list-style-type: none"> • Ensure consistency with version 01.0 of the “CDM project standard for programmes of activities (CDM-EB93-A07-STAN); • Make editorial improvements.
01.0	1 April 2015	Initial publication.

Decision Class: Regulatory
 Document Type: Form
 Business Function: Issuance
 Keywords: monitoring report, programme of activities
